

50W Flood Light



Ideal for outdoor applications such as parking lots, construction sites, storage and rail yards, industrial locations, marinas, billboard/sign illumination and more



TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	6,179
Efficacy	126.31 lm/W
CCT	5000K
Beam angle	90 x 120°
CRI	82.6
Dimmable	No
Rated hours	50,000
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E352127
DLC	PXATC8G6

DIMENSIONS



ILLUMINANCE AT A DISTANCE

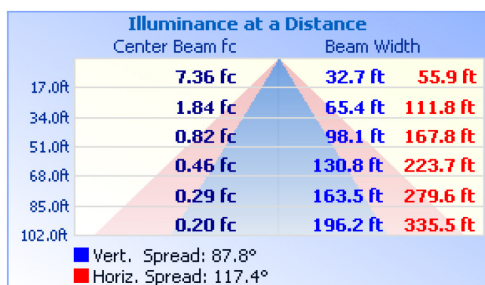

ELECTRICAL

Wattage	50W
Voltage	120-277V
Power factor	0.92
THD	16.46
Operating temp	-40° to 55°C

CONSTRUCTION

Housing	Aluminum
Finish	6mm, powder coat
Colour	Matte black
IP rating	IP65
Weight	3.96 lbs
Carton qty	6

NOTES

1m-cUL listed cable included

Optional slip fitter adaptor: #Slipfit-UV



PHOTOMETRIC SPECS

